


PE-HB10 SERIES

HELICOPTER STYLE CONDUCTOR STRINGING BLOCK

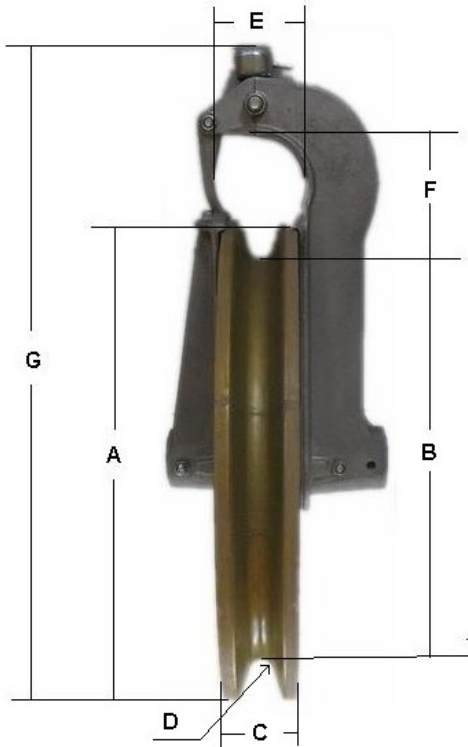

P/N	General Dimensions in inches							Weight	Max. Safe Working Load
PE-HB10	A	B	C	D	E	F	G	15 LB	7,000 LB
	10.5	8.6	3.15	0.52	3.54	4.45	17		

HELICOPTER STYLE CONDUCTOR STRINGING BLOCK SPEC

HELICOPTER STYLE CONDUCTOR STRINGING BLOCK SPEC.



General Tech. Data

- T6 Heat treated high-strength aluminum alloy A356 for entire frame construction.
- Precision ground, deep-groove type shielded ball bearings.
- All ferrous components are protected from corrosion by Zinc plated or hot dip galvanized.
- Pulling line sheaves are lined with high strength, UV resistant urethane.
- 20K ball-eye socket clevis to match with all standard fittings.
- Safe Working Load is referenced to Single Resultant Vertical Load on Center (Pulling Line) Sheave.

Design and specifications are subject to change without notice.