


PE-HB SERIES

HELICOPTER STYLE CONDUCTOR STRINGING BLOCK

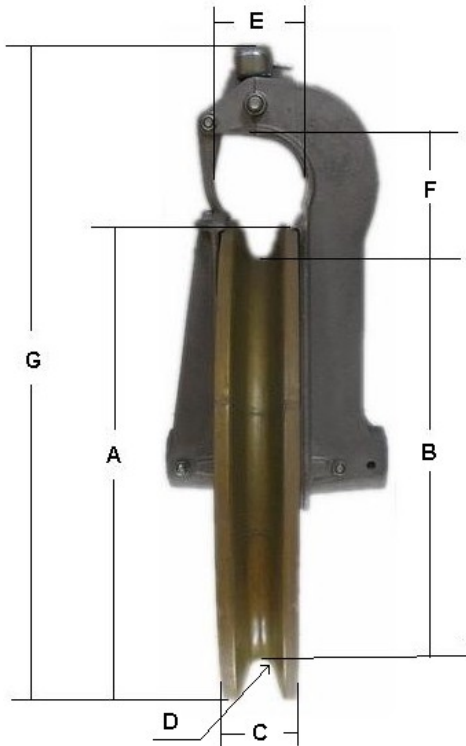


P/N	General Dimensions in inches							Weight	Max. Safe Working Load
PE-HB10	A	B	C	D	E	F	G	15 LB	5,000 LB
	10.5	8.6	3.15	0.52	3.54	4.45	17		

P/N	General Dimensions in inches							Weight	Max. Safe Working Load
PE-HB16	A	B	C	D	E	F	G	26 LB	9,000 LB
	16.5	14	2.40	0.63	3.2	3.8	24		

P/N	General Dimensions in inches							Weight	Max. Safe Working Load
PE-HB22	A	B	C	D	E	F	G	51 LB	12,000 LB
	22	18	3.23	0.81	4	5.5	29.5		

P/N	General Dimensions in inches							Weight	Max. Safe Working Load
PE-HB28	A	B	C	D	E	F	G	69 LB	12,000 LB
	28	24	3.54	0.87	4.33	6	36		

P/N	General Dimensions in inches							Weight	Max. Safe Working Load
PE-HB32	A	B	C	D	E	F	G	78 LB	12,000 LB
	32	28	3.58	0.95	4.33	6.00	39.6		

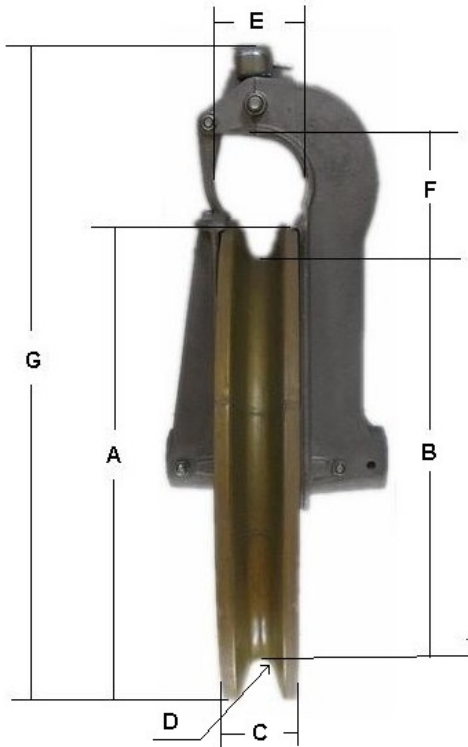

P/N	General Dimensions in inches							Weight	Max. Safe Working Load
PE-HB35	A	B	C	D	E	F	G	86 LB	15,000 LB
	35	30.50	3.58	1.08	4.33	6.00	42.5		

P/N	General Dimensions in inches							Weight	Max. Safe Working Load
PE-HB40	A	B	C	D	E	F	G	117 LB	15,000 LB
	40	35.70	3.58	1.04	4.33	6.00	47		

P/N	General Dimensions in inches							Weight	Max. Safe Working Load
PE-HB42	A	B	C	D	E	F	G	179 LB	15,000 LB
	42	36	6.0	2	6.90	9.00	50		



General Tech. Data

- T6 Heat treated high-strength aluminum alloy 356 for entire frame construction.
- Precision ground, deep-groove type shielded ball bearings.
- All ferrous components are protected from corrosion by Zinc plated or hot dip galvanized.
- Pulling line sheaves are lined with high strength, wear resistant urethane or optional Neoprene.
- 30K ball-eye socket clevis to match with all standard fittings.
- Safe Working Load is referenced to Single Resultant Vertical Load on Center (Pulling Line) Sheave.
- Available in sheave sizes from 10" to 42". Safe working loads range from 7,000 lbs to 15,000 lbs
- Conductor ranges covered include 3/0 CIR. MIL. ACSR to 2515 CIR. MIL. ACSR.

The following types of optional attachments are available:

- * Helicopter attachments.
- * Traveler stands.

Design and specifications are subject to change without notice.

PowerLine
Equipment
Specialists