


PE Series Swivels

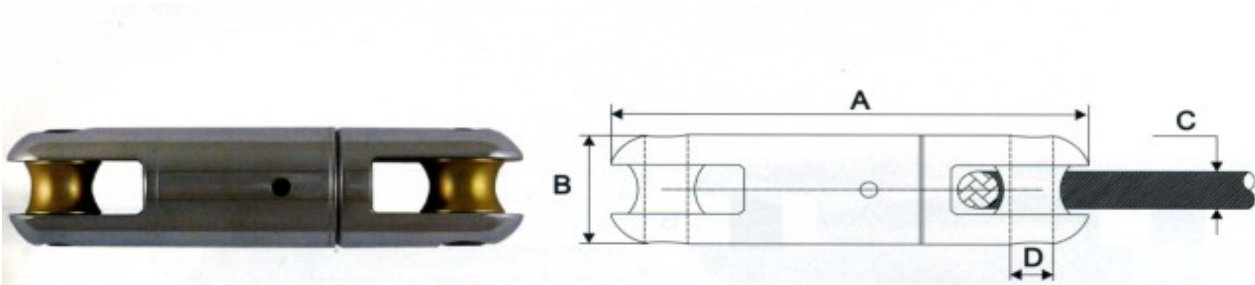

Model	SWL 3:1	SWL 5:1	Breaking Point	A(in)	B(in)	C(in)	D(in)	W(lb)
PE-5000	5,000lb	3,000lb	8 tons	5.39	1.26	0.51	0.51	1.32
PE-10000	10,000lb	6,000lb	15 tons	6.00	1.53	0.67	0.55	1.76
PE-15000	15,000lb	9,000lb	20 tons	6.30	1.65	0.70	0.63	2.42
PE-28000	28,000lb	16,800lb	38 tons	7.17	2.04	0.86	0.78	4.40
PE-50000	50,000lb	30,000lb	68 tons	11.8	2.67	1.18	1.02	11.00

Remarks: Advantages for PE series (roller type pin):

- * Better protection of pulling rope
- * Secured screw
- * More rope stringing space
- * Reduced rope bend radius improving strength

- Material is high strength heat treated steel.
- Bearing is thrust ball bearing, preventing winding & tangling during pulling the rope/cable.

Must not pass through bullwheel on the puller/tensioner

PowerLine
Equipment
Specialists

sales@powerline-equipment.com

www.powerline-equipment.com

1-866-637-0230

(503) 699-3091

(503) 635-0870 fax